

# Subrack System Sierra 10 - 48/230



Sierra is the world's first multidirectional power converter.  
One system for securing AC & DC loads, and many more, in 1 RU high!

 Telecom
  Datacom
  Mass transport
  Industry
  Power Utilities
  Renewable



## Introduction


This **Subrack System** is an all-in-one solution including the **Sierra 10 - 48/230** power converters, **Inview S Slot** monitoring and AC & DC bulk outputs in only **1U high**. The system is single-phase and designed for 48 Vdc (DC loads & batteries) and 230 Vac (grid & AC loads) infrastructures. The solution is modular: you can start with a single module (1.2 kW) and increase, according to your needs, up to 4.8 kW.



## Technology


Sierra is the world's first **fully bidirectional** power converter. The **three ports** (two AC and one DC) built into each module can all function as **input and output**. This means that you can use it to **secure AC & DC loads** and charge **batteries** at the same time.

Sierra is also the right choice for **energy management** applications such as grid reinjection, peak shavings, phase balancing or **innovative solutions** based on energy sharing via a DC distribution.

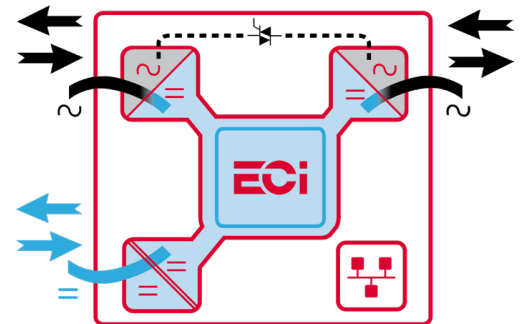

## How it works?

At the heart of each module, there is a **DC energy buffer**. It uses the energy that comes, whatever its source, to feed what needs it. The total output power is **shared live** between the loads and the batteries. It's that simple! No configuration is required, you are totally autonomous.

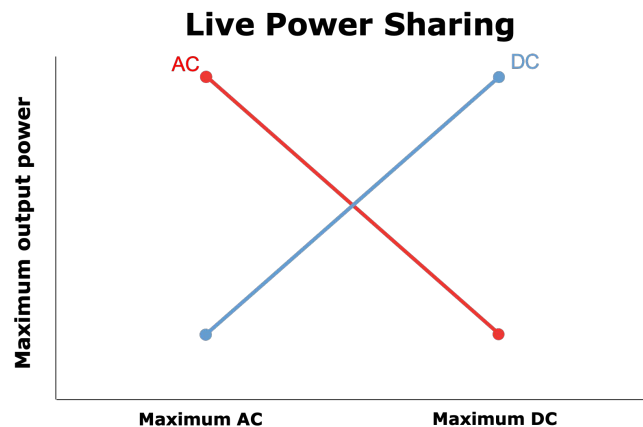

### Key features:

- Secure AC & DC loads
- Modular (by increments of 1.2 kW)
- Highest power density (1U high)
- Hot-swappable capacity
- Easy to install and operate
- User-friendly monitoring

Illustrations are non-binding and may include customized fittings.

# Subrack System - Sierra 10 - 48/230

General	1.2 KW / 1.25 kVA	2.4 KW / 2.5 kVA	3.6 KW / 3.75 kVA	4.8 KW / 5 kVA
Part Number	S71A73E0104SN0000N001	S71A73E0204SN0000N001	S71A73E0304SN0000N001	S71A73E0404SN0000N001
Cooling / Audible noise	Self-adjustable speed / < 65 dBA at 1 meter			
MTBF	200 000 hrs (MIL-2171F)			
Dielectric strength DC/AC	4300 Vdc			
RoHS	Compliant			
Operating T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-3 Class 3.1 -20°C to 40°C, power de-rating from 40°C to 65°C / Max RH 95% for 96 hours per year			
Storage T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-1 Class 1.2 -40°C to 70°C / Max RH 95% for 96 hours per year			
Public transport T°/Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-2 Class 3.1 -40°C to 70°C / Max RH 95% for 96 hours per year			
Material (casing)	Aluminium / Zinc coated steel			
Power				
AC Input Data				
Nominal voltage (AC) / Current	230 Vac			
Nominal current	4.6 A	9.2 A	13.8 A	18.4 A
Voltage range (AC)	150 - 265 Vac			
Brownout for per module	800 W @ 150 Vac / 1000 W @ 190 Vac linear decreasing			
Power factor / THD	> 99% / < 3%			
Frequency range (selectable) / synchronization range	50 Hz (range 47 – 53 Hz) / 60 Hz (range 57 – 63 Hz)			
DC Input Data				
DC voltage: Nominal / range	48 Vdc / (40-60V) <sup>1</sup>			
Nominal current (at 48 Vdc)	22.4 A	44.8	67.2	89.6
Maximum input current (for 15 second) / voltage ripple	34 A / < 10 mV RMS	68 A / < 10 mV RMS	101 A / < 10 mV RMS	135 A / < 10 mV RMS
AC Output Data				
Efficiency AC to AC (EPC) / DC to AC / AC to D	96% / >93% / >93%			
Nominal voltage AC <sup>2</sup> (Adjustable)	230 V (200 - 240 Vac)			
Frequency / frequency accuracy	50 or 60 Hz / 0.03%			
Nominal Output power <sup>3</sup>	1.25 kVA / 1 kW	2.5 kVA / 2 kW	3.75 kVA / 3 kW	5 kVA / 4 kW
Short time overload capacity	150% (15 seconds)			
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive			
Total harmonic distortion (resistive load)	< 3%			
Load impact recovery time (10% - 90%)	≤ 0.4 ms			
Nominal current @ 230 Vac	5.4 A	10.8	16.2	21.6
Crest factor at nominal power	3 : 1 for load P.F. ≤ 0.7			
Short circuit clear up capacity 0-20 ms	21.7 A	43.4 A	65.1 A	86.8 A
Short circuit current after >20 ms for one minute	8.1 A	16.2 A	24.3 A	32.4 A
AC output voltage stability	±1% from 10% to 100% load			
DC Output Data (per module)				
Nominal voltage (range)	53.5 Vdc (44 - 60 Vdc)			
Maximum power <sup>4</sup>	1 kW	2 kW	3 kW	4 kW
Maximum current at 48 Vdc	20.8 A	41.6 A	62.4 A	83.2 A
Reverse polarity protection	YES			
Efficiency AC to D	> 93%			
Max. Voltage interruption / total transient voltage duration (max)	0 sec / 0 sec			
Signaling & Supervision				
Supervision / Part number	Inview S Slot / T602004110			
Remote on / off	On rear terminal of the shelf			
Safety & EMC				
Safety	EN62040-1			
EMC	EN 61000-4-2 / EN 61000-4-3 / EN 61000-4-4 / EN 61000-4-5 / EN 61000-4-6 / EN 61000-4-8 ETSI EN 300386 v1.9.1			

- 1 Permanent 1 kW / de-rating apply based on internal heatsink T°
- 2 Operation within lower voltage networks leads to de-rating of power performances.
- 3 Each module at 1 kW AC load, still **200 W** available for **48 V DC output**.
- 4 Each module at 1 kW DC load, still **200 W** available for **230 Vac AC output**

Subrack System - Sierra 10 - 48/230 – Datasheet v2.0. Specifications can change without notice. New data will be updated on our website: <https://www.cet-power.com>.  
The present equipment is protected by several international patents, trademarks and copyrights.

